

# 2025 CATALOG



**WINCHESTER** 

**SUPREME**  
— OPTICS —



WINCHESTER®

1F64 - 23Y0487



## A Legendary Brand. A Legendary Promise.

Introducing Winchester® Supreme® Optics – a groundbreaking line renowned for precision and clarity. With premium HD glass, WINcoat™ coating, and timeless designs, these optics deliver unrivaled performance. Our complete line of Supreme® Optics include: Riflescopes, Binoculars, Laser Rangefinders and Spotting Scopes.

Backed by a Limited Lifetime Warranty, our optics redefine excellence for durability, clarity, and clear optics every time.



PREMIUM GLASS



WATERPROOF



FOG-PROOF  
WINcoat™ COATING



LIMITED LIFETIME  
WARRANTY





**RIFLESCOPES**



**BINOCULARS**



**SPOTTING SCOPES**



**RANGEFINDERS**

# RIFLESCOPES


Winchester Supreme quality and performance at the range and in the field ensures you have a dependable optic to trust on your favorite rifle, for your next great adventure on paper or game.

Premium lenses transmit the maximum amount of light to your eye through our Winchester WINcoat™ multicoating. This coating not only reduces harsh glare but carries accurate color while providing a durable scratch resistant coating to exterior lens surfaces.


Winchester Supreme riflescopes utilize Second Focal Plane (SFP) reticles. This means that the reticle stays the same size throughout the scope's magnification range, while only the image changes size. This allows for the most precise shot placement at any distance, and the reticle will always have the same appearance.

## Key Features


- » Fully multi-coated lenses throughout the optical system.
- » Excellent low light performance.
- » Beryllium bronze springs.
- » One-piece housing machined from tough A6063-T6 aluminum.
- » Black anodized aluminum exterior.
- » Designed to stand up to 800 Gs of recoil for standard & magnum rifles, and muzzleloaders.
- » Nitrogen filled and sealed optical system for fog and waterproof performance.
- » Smooth fast focus eyepiece adjustment.
- » Knurled power adjustment ring and turret knobs for a secure grip.
- » Fingertip turret adjustment for windage and elevation.
- » Zero reset turrets can quickly be adjusted back to zero with a screwdriver or coin.
- » Lens cover, cleaning cloth, and user manual.

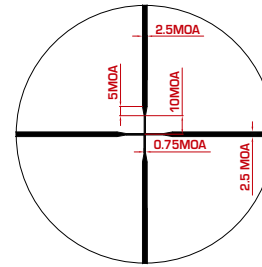

Winchester® Supreme®  
Wire Reticle

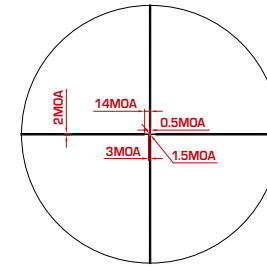

Winchester® Supreme®  
Illuminated Reticle  
1-4x24

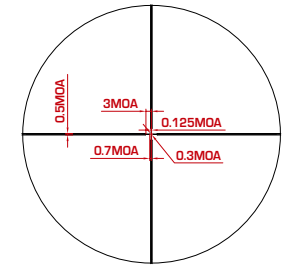

Winchester® Supreme®  
Illuminated Reticle  
6-18x50

Objective Lens

Windage  
Turret

Elevation  
Turret

Windage and  
Elevation Caps



IR Adjustments  
(If Applicable)

Parallax Adjustment  
(If Applicable)

Ocular Lens

Fast Focus  
Eyepiece (FF)



**HUNT RETICLE**  
FAST TARGET ACQUISITION



**ONE INCH**  
TUBE DIAMETER



**FOG-PROOF**  
WINcoat™ COATING



**WATERPROOF**  
IPX7



**PREMIUM GLASS**  
HIGH DEFINITION OPTICS



**LIMITED LIFETIME  
WARRANTY**

**WQ-RS-SPRM5-1-4X24IR**  
UPC: 840369202291



**1-4X24 MM IR**

**WQ-RS-SPRM6-2-7X32**  
UPC: 840369202307



**2-7X32 MM**

**WQ-RS-SPRM7-3-9X40**  
UPC: 840369202314



**3-9X40 MM**

**WQ-RS-SPRM10-3-5-10X50**  
UPC: 840369202345



**3.5-10X50 MM**

**WQ-RS-SPRM8-4-12X44SF**  
UPC: 840369202321



**4-12X44 MM SF**

**WQ-RS-SPRM9-6-18X50SFIR**  
UPC: 840369202338




**6-18X50 MM SFIR**







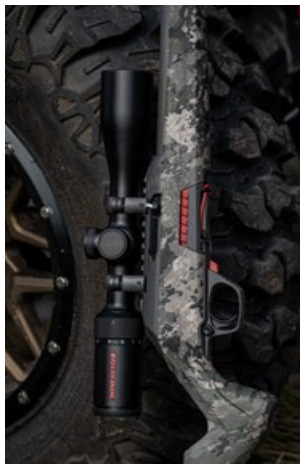








SPECIFICATIONS	1-4x24 mm IR (Illuminated Reticle)	2-7x32 mm	3-9x40 mm	4-12x44 mm SF (Side Focus)	3.5-10x50 mm	6-18x50 mm SFIR (Side Focus Illuminated Reticle)
						
ITEM NUMBER	WQ-RS-SPRM5-1-4X24IR	WQ-RS-SPRM6-2-7X32	WQ-RS-SPRM7-3-9X40	WQ-RS-SPRM8-4-12X44SF	WQ-RS-SPRM10-3-5-10X50	WQ-RS-SPRM9-6-18X50SFIR
UPC	840369202291	840369202307	840369202314	840369202321	840369202345	840369202338
MAGNIFICATION RANGE	1X - 4X	2X - 7X	3X - 9X	4X - 12X	3.5X - 10X	6X - 18X
OBJECTIVE LENS DIAMETER	24 mm	32 mm	40 mm	44 mm	50 mm	50 mm
OBJECTIVE OUTSIDE DIAMETER	30 mm	39.5 mm	47.5 mm	51.5 mm	57.5 mm	57.5 mm
OCULAR LENS DIAMETER	35.5 mm	35.5 mm	35.5 mm	35.5 mm	35.5 mm	35.5 mm
OCULAR OUTSIDE DIAMETER	44 mm	44 mm	44 mm	44 mm	44 mm	44 mm
BODY TUBE DIAMETER	30 mm	1 inch	1 inch	1 inch	1 inch	30 mm
LENGTH	241.7 mm (9.5 inch)	280 mm (11.1 inch)	313 mm (12.3 inch)	315 mm (12.4 inch)	331 mm (13.1 inch)	352 mm (13.8 inch)
WEIGHT	459 g (16.2 oz)	452 g (16 oz)	501.5 g (17.5 oz)	604.5 g (21.3 oz)	543 g (19 oz)	659.5 g (23 oz)
CONSTRUCTION MATERIAL	A6063-T6	A6063-T6	A6063-T6	A6063-T6	A6063-T6	A6063-T6
BODY CONSTRUCTION	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
COLOR / FINISH	Black Matte	Black Matte	Black Matte	Black Matte	Black Matte	Black Matte
WATERPROOF	YES	YES	YES	YES	YES	YES
FOGPROOF	YES	YES	YES	YES	YES	YES
SHOCKPROOF	YES	YES	YES	YES	YES	YES
SIDE FOCUS	NA	NA	NA	YES	NA	YES
PARALLAX ADJUSTMENT	NA	NA	NA	YES	NA	YES
PARALLAX ADJUSTMENT RANGE	NA	NA	NA	15 yds - ∞	NA	10 yds - ∞
PARALLAX SETTING	100 yds	60 yds	100 yds	100 yds	100 yds	100 yds
ADJUSTMENT TURRET TYPE	Low Turret-Finger Adjustable	Low Turret-Finger Adjustable	Low Turret-Finger Adjustable	Low Turret-Finger Adjustable	Low Turret-Finger Adjustable	Low Turret-Finger Adjustable
WINDAGE ADJUSTMENT RANGE	200 MOA	100 MOA	90 MOA	80 MOA	70 MOA	70 MOA
HORIZONTAL EFFECTIVE ADJUSTMENT RANGE	±100 MOA	±50 MOA	±45 MOA	±40 MOA	±35 MOA	±35 MOA
ELEVATION ADJUSTMENT RANGE	200 MOA	100 MOA	90 MOA	80 MOA	70 MOA	70 MOA
VERTICAL EFFECTIVE ADJUSTMENT RANGE	±100 MOA	±50 MOA	±45 MOA	±40 MOA	±35 MOA	±35 MOA
CLICK VALUE	0.5 MOA	0.25 MOA	0.25 MOA	0.25 MOA	0.25 MOA	0.25 MOA
RETICLE TYPE (ETCHED / WIRE)	Etched	Wire	Wire	Wire	Wire	Etched
RETICLE DESIGN	Illuminated	Plex	Plex	Plex	Plex	Illuminated
EYE RELIEF	116 mm - 98 mm (4.6 - 3.8 inch)	120 mm - 98 mm (4.5 - 3.9 inch)	120 mm - 98 mm (5.2 - 4.1 inch)	120 - 98 mm (4.7 - 3.9 inch)	132 mm - 104 mm (5.2 - 4.1 inch)	109 - 93 mm (4.3 - 3.6 inch)
EXIT PUPIL	24 mm-6 mm	14.46 mm - 4.57 mm	13.33 mm - 4.44 mm	11 mm - 3.67 mm	15.2 mm - 5.2 mm	8.33 mm - 2.77 mm
FIELD OF VIEW (FOV) @ 100 YARDS	116.6 ft - 28.8 ft	52.4 ft - 15 ft	38.4 ft - 12.8 ft	26.2 ft - 8.7 ft	27.1 ft - 9.58 ft	19.2 ft - 6.4 ft
FOCAL PLANE	Second (SFP)	Second (SFP)	Second (SFP)	Second (SFP)	Second (SFP)	Second (SFP)
DIOPTRER COMPENSATION	+2/-2.5	+2/-2.5	+2/-2.5	+2/-2.5	+2/-2.5	+2/-2.5
ZERO STOP	NO	NO	NO	NO	NO	NA
THREADED FOR SUNSHADE	NO	NO	NO	NO	NO	NO
RESETTABLE TURRET	YES	YES	YES	YES	YES	YES
IP RATING	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)
BATTERY	CR2032	NA	NA	NA	NA	CR2032
FULL MULTICOAT TYPE	Winchester WINcoat™	Winchester WINcoat™	Winchester WINcoat™	Winchester WINcoat™	Winchester WINcoat™	Winchester WINcoat™



## BINOCULARS

Introducing the Winchester® Supreme® Binoculars — setting a new standard for clarity and durability. Featuring premium HD glass, WINcoat™ coating for glare reduction and fog elimination.

Our Winchester WINcoat™ fully multicoated lenses protect from dirt and debris while transmitting maximum light to your eye with excellent color and clarity. Our modern PPS thermoplastic frame is high strength and light, with an attractive tactile coating for a sure grip in all weather conditions. Smooth focusing ensures a pleasant experience while viewing in the field, the stadium, or in the sky.

The rubberized housing ensures a solid grip in challenging conditions, while heavy knurling makes adjustments effortless, even with gloves.

Hunters and bird watchers achieve accurate color saturation with reduced weight for all day comfortable carry.



### Key Features

- » High quality BAK4 prisms with high density (HD) glass for brighter, clearer, and crisper detailed images from edge to edge, even in low light conditions.
- » Fully multi-coated lenses throughout the optical system for increased light transmission, reduced glare, improved image quality and crisp edge to edge performance.
- » Silver coated phase correcting prism lenses for higher light transmission, brighter images with increased contrast.
- » Wide Band green objective and eyepiece lens coatings for excellent light transmission and reduced glare.
- » High performance PPS thermoplastic chassis construction that balances light weight with rigid construction and rugged durability.
- » Nitrile NBR / PVC protective rubber armoring that resists heat & oil, provides excellent shock absorption, provides a slip resistant grip, and has high abrasion resistance for long term use.
- » Twist up eyecups for use with or without eyeglasses.
- » Nitrogen filled and sealed optical system for fog and waterproof performance.
- » Knurled focus adjustment knobs for a secure grip.
- » Accessories: Protective nylon foam padded case with strap, belt loop, and buckle closure for ease of transportation and protection in storage, high quality comfortable binocular chest harness system with quick release buckles for all day use and hands free carrying, removable rubber eyepiece and objective covers to protect your lenses, ultra soft microfiber cleaning cloth to remove dust, smudges, and dirt.



**RUBBERIZED HOUSING**  
SOLID GRIP, ANY ENVIRONMENT



**PREMIUM GLASS**  
HIGH DEFINITION OPTICS



**WATERPROOF**  
IPX7



**FOG-PROOF**  
WINcoat™ COATING



**LIMITED LIFETIME WARRANTY**

**WQ-BI-SPRM1-W12-0842**  
UPC: 840369202253



**8X42 MM**

**WQ-BI-SPRM2-W12-1042**  
UPC: 840369202260



**10X42 MM**

**WQ-BI-SPRM3-W6-1050**  
UPC: 840369202277



**10X50 MM**

**WQ-BI-SPRM4-W6-1250**  
UPC: 840369202284



**12X50 MM**







WINCHESTER® SUPREME® BINOCULAR	8X42 mm	10X42 mm	10X50 mm	12X50 mm
				
Item Number	WQ-BI-SPRM1-W12-0842	WQ-BI-SPRM2-W12-1042	WQ-BI-SPRM3-W6-1050	WQ-BI-SPRM4-W6-1250
UPC	840369202253	840369202260	840369202277	840369202284
MAGNIFICATION	8X	10X	10X	12X
OBJECTIVE LENS DIAMETER	42 mm	42 mm	50 mm	50 mm
OCULAR LENS DIAMETER	24 mm	21 mm	23.5 mm	21 mm
TYPE OF PRISM	Roof / BaK4	Roof / BaK4	Roof / BaK4	Roof / BaK4
PRISM COATING	Silver	Silver	Silver	Silver
LENS COATING	WINcoat™ full multicoat	WINcoat™ full multicoat	WINcoat™ full multicoat	WINcoat™ full multicoat
FOCUS SYSTEM	Central focus	Central focus	Central focus	Central focus
EXIT PUPIL DIAMETER	5.3 mm	4.3 mm	4.88 mm	4.19 mm
EXIT PUPIL DISTANCE	17.5 mm	15.1 mm	17 mm	15 mm
FIELD OF VIEW (FOV)	7.5°	6.2°	6.1°	5.2°
FOV 1000 YARDS	395 ft	330 ft	321 ft	273 ft
FOV 1000 METERS	132 m	110 m	107 m	91 m
CLOSE FOCUS MINIMUM	3 m / 10 ft	3 m / 10 ft	3 m / 10 ft	3 m / 10 ft
DIOPTER SYSTEM	Right diopter ring	Right diopter ring	Right diopter ring	Right diopter ring
DIOPTER COMPENSATION	±3	±3	±3	±3
INTERPUPILLARY DISTANCE	56~73 mm	56~73 mm	57~72 mm	57~72 mm
WEATHER PROOF	Yes	Yes	Yes	Yes
WATERPROOF	Yes	Yes	Yes	Yes
NITROGEN FILLED	Yes	Yes	Yes	Yes
EYECUPS SYSTEM	Twist-up	Twist-up	Twist-up	Twist-up
CHASSIS MATERIAL	PPS	PPS	PPS	PPS
IP RATING	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)







## SPOTTING SCOPES

Winchester Supreme spotting scopes incorporate brilliant fully multicoated glass that transmits intense colors and crisp detail, even in low light conditions. Color-saturated images with razor-sharp contrast and clarity that make the smallest details come to life. A smooth focus dial allows precise adjustments to define fur, feathers or antlers at extreme distances, and a large magnification range means your 100% waterproof spotter is perfect for all your outdoor adventures. A rotating collar positions the scope for maximum comfort and utility on the bench or in the field. Light weight and ergonomic, your Winchester Supreme spotting scope comes with a bench top tripod and a quality protective case designed for field use and carry.

Maximum power for the finest details at the longest distances! Our 65mm version provides ample power for hunters on the move, and our 80mm version allows maximum light transmission to the eye for the sharpest contrast and detail in all conditions, especially dawn and dusk.

### Key Features

- » Multi-coated lenses
- » Nitrogen Sealed Housing
- » Fogproof
- » 100% Waterproof rubber armor housing
- » Bench Tripod Included
- » Rugged Carrying Case & Lens Cloth Included

Twist-up Eyecup



80 mm model shown for reference



The spotting scope also includes a bench tripod, carrying/field case with a shoulder strap, lens cleaning cloth, and lens covers.



**DURABLE  
CONSTRUCTION**



**REDUCED GLARE**  
WINcoat COATING



**FOG-PROOF**  
WINcoat™ COATING



**WATERPROOF**  
IPX7



**PREMIUM GLASS**  
HIGH DEFINITION OPTICS



**LIMITED LIFETIME  
WARRANTY**

**WQ-SS-ISUOW13-WQ-SS-SPRM12-20-60X65**  
UPC: 840369204332



**20-60X65 MM**

**WQ-SS-ISUOW14-WQ-SS-SPRM13-20-60X80**  
UPC: 840369204349



**20-60X80 MM**













WINCHESTER® SUPREME® SPOTTING SCOPE	20-60x65 mm Angled		20-60x80 mm Angled	
				
Item Number	WQ-SS-ISUOW13-WQ-SS-SPRM12-20-60X65		WQ-SS-ISUOW14-WQ-SS-SPRM13-20-60X80	
UPC	840369204332		840369204349	
POWER	20X	60X	20X	60X
OBJECTIVE LENS DIAMETER	65 mm	65 mm	80 mm	80 mm
OCULAR LENS DIAMETER	20.5 mm	20.5 mm	25 mm	25 mm
EXIT PUPIL DIAMETER	3.2 mm	1.1 mm	4.0 mm	1.3 mm
OCULAR LENS OUTSIDE DIAMETER	22 mm	22 mm	28 mm	28 mm
OBJECTIVE LENS OUTSIDE DIAMETER	66.5 mm	66.5 mm	82 mm	82 mm
EXIT RELIEF	18 mm	13 mm	17 mm	15 mm
FIELD OF VIEW	1.9°	0.9°	1.9°	0.9°
	99 ft	48 ft	99 ft	48 ft
	33 m	16 m	33 m	16 m
MIN. FOCAL LENGTH	6 m	6 m	8 m	8 m
	19 ft	19 ft	26 ft	26 ft
WATERPROOF	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)
SUN SHADE	Yes	Yes	Yes	Yes
NITROGEN FILLED	Yes	Yes	Yes	Yes
EYECUPS SYSTEM	Twist-up	Twist-up	Twist-up	Twist-up
UNIT DIMENSION	375 x 85 x 155 mm	375 x 85 x 155 mm	485 x 100 x 175 mm	485 x 100 x 175 mm
	14.76" x 3.35" x 6.10"	14.76" x 3.35" x 6.10"	19.09" x 3.94" x 6.89"	19.09" x 3.94" x 6.89"
UNIT WEIGHT	1120 g	1120 g	1700 g	1700 g
	39.51 oz	39.51 oz	59.97 oz	59.97 oz
CONSTRUCTION MATERIAL	ABS		ABS	
TRIPOD SIZE	295 x 63 x 67 mm / 11.6" x 2.5" x 2.64"		295 x 63 x 67 mm / 11.6" x 2.5" x 2.64"	
TRIPOD WEIGHT	238 g / 8.4 oz		238 g / 8.4 oz	
TRIPOD MAX HEIGHT	245 mm / 9.65"		245 mm / 9.65"	
TRIPOD CONSTRUCTION	2A12 Steel Alloy		2A12 Steel Alloy	



## RANGEFINDER

When your hunt demands precise ranging over vast distances, Winchester® Supreme® Laser Rangefinders deliver the performance and durability you need.

The Winchester® Range Rider HD2000 laser rangefinder offers a maximum range of 2,000 yards, with 750 yards on game. Featuring 6x magnification and an HD optical system, it provides enhanced clarity and detail for spotting game at long distances.

The red OLED display ensures visibility in low light conditions, while three target modes (Normal, First, and Last) and two ranging modes (HCD and LOS) adapt to any hunting environment.

### Key Features

- » Maximum Range 2,000 yards
- » 6x Magnification
- » Coated HD Optics
- » 100% Waterproof Rubber Armor Housing
- » Three Target Modes
- » Wrist strap lanyard, padded carrying case, lens cleaning cloth, and one CR2 battery.



**FAST & ACCURATE**  
RELIABLE MEASUREMENTS



**WATERPROOF**  
IPX4



**PREMIUM GLASS**  
HIGH DEFINITION OPTICS



**ENERGY EFFICIENT**  
40-HOUR RUN TIME



**CR2 BATTERY**  
INCLUDED



**LIMITED LIFETIME**  
WARRANTY



WQ-RF-ISUOW12-WQ-RF-SPRM10-6X20  
UPC: 840369204325



6X20 MM

WQ-RF-ISUOW11-WQ-RF-SPRM11-7X24  
UPC: 840369204318





7X24 MM









WINCHESTER® SUPREME® LASER RANGEFINDER	6x20 mm	7x24 mm
		
Item Number	WQ-RF-ISUOW12-WQ-RF-SPRM10-6X20	WQ-RF-ISUOW11-WQ-RF-SPRM11-7X24
UPC	840369204325	840369204318
MAGNIFICATION	6X	7X
OBJECTIVE LENS DIAMETER	20 mm	24 mm
OCULAR LENS DIAMETER	14 mm	14 mm
MINIMUM RANGE	5 yds	5 yds
MAX REFLECTIVE RANGE	2000 yds	3000 yds
RANGE (BUILDING)	1200 yds	1700 yds
RANGE (TREE)	900 yds	1200 yds
RANGE (DEER)	750 yds	1000 yds
INCLINOMETER	± 60°	± 60°
BATTERY TYPE	CR2	CR2
DISPLAY	RED LCD	RED OLED, 7 Brightness Settings
TARGETING MODES	Normal, First, Last	Normal, First, Last
RANGING MODES	HCD, LOS	HCD, LOS
SIZE	98 x 78 x 36 mm / 3.86" x 3.07" x 1.42"	114 x 37 x 76 mm / 4.49" x 1.47" x 2.98"
WEIGHT	5.54 oz with battery / 157 g	6.1 oz with battery / 173 g
EYE RELIEF	14 mm	14 mm
ANGULAR FIELD OF VIEW	6.5°	6.5°
LINEAR FIELD OF VIEW	114 m @ 1000 m, 114 y @ 1000 y	114 m @ 1000 m, 114 y @ 1000 y
IP RATING	IPX4	IPX4
MATERIAL	PPS, PC+ABS, Rubber, Optical Glass	PPS, PC+ABS, Rubber, Optical Glass





**WINCHESTER** 

**SUPREME**<sup>®</sup>  
— OPTICS —

Riflescopes ■ Binoculars ■ Spotting Scopes ■ Rangefinders

A LEGENDARY BRAND. A LEGENDARY PROMISE.

Phone: 888-811-2979 | Email: [info@winchesteroptics.com](mailto:info@winchesteroptics.com) | Web: [winchesteroptics.com](http://winchesteroptics.com)

©2024 Apogee, Inc. | Made by Apogee, Inc. for Winchester® | Winchester® is a registered trademark of Olin Corporation and is used with permission.