

WINCHESTER
— OPTICS —



2026 CATALOG





A Legendary Brand. A Legendary Promise.

Introducing Winchester[®] Supreme[®] Optics – a groundbreaking line renowned for precision and clarity. With premium HD glass, WINcoat[™] coating, and timeless designs, these optics deliver unrivaled performance. Our complete line of Supreme[®] Optics include: Riflescopes, Binoculars, Laser Rangefinders and Spotting Scopes, and Thermal Scopes and Sights.

Backed by a Limited Lifetime Warranty, our optics redefine excellence for durability, clarity, and clear optics every time. Our Thermal Optics are backed by a Limited 5 Year Warranty, providing best in class performance and functionality.



FOG-PROOF
WINcoat[™] COATING



WATERPROOF



PREMIUM GLASS



**LIMITED LIFETIME
WARRANTY**



**SUPREME THERMAL
WARRANTY**





RIFLESCOPES



THERMAL HUNTING SIGHTS



BINOCULARS



SPOTTING SCOPES



RANGEFINDERS

RIFLESCOPES


Winchester Supreme quality and performance at the range and in the field ensures you have a dependable optic to trust on your favorite rifle, for your next great adventure on paper or game.

Premium lenses transmit the maximum amount of light to your eye through our Winchester WINcoat™ multicoating. This coating not only reduces harsh glare but carries accurate color while providing a durable scratch resistant coating to exterior lens surfaces.


Winchester Supreme riflescopes utilize Second Focal Plane (SFP) reticles. This means that the reticle stays the same size throughout the scope's magnification range, while only the image changes size. This allows for the most precise shot placement at any distance, and the reticle will always have the same appearance.

Key Features


- » Fully multi-coated lenses throughout the optical system.
- » Excellent low light performance.
- » Beryllium bronze springs.
- » One-piece housing machined from tough A6063-T6 aluminum.
- » Black anodized aluminum exterior.
- » Designed to stand up to 800 Gs of recoil for standard & magnum rifles, and muzzleloaders.
- » Nitrogen filled and sealed optical system for fog and waterproof performance.
- » Smooth fast focus eyepiece adjustment.
- » Knurled power adjustment ring and turret knobs for a secure grip.
- » Fingertip turret adjustment for windage and elevation.
- » Zero reset turrets can quickly be adjusted back to zero with a screwdriver or coin.
- » Lens cover, cleaning cloth, and user manual.



Winchester® Supreme®
Wire Reticle



Winchester® Supreme®
Illuminated Reticle
1-4x24

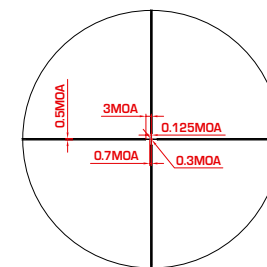

Winchester® Supreme®
Illuminated Reticle
6-18x50

Objective Lens

Windage Turret

Elevation Turret

Windage and Elevation Caps

Ocular Lens

IR Adjustments (If Applicable)

Parallax Adjustment (If Applicable)

Fast Focus Eyepiece (FF)



HUNT RETICLE
FAST TARGET ACQUISITION



ONE INCH
TUBE DIAMETER



FOG-PROOF
WINcoat™ COATING



WATERPROOF
IPX7



PREMIUM GLASS
HIGH DEFINITION OPTICS



**LIMITED LIFETIME
WARRANTY**

MPN: 1-4X24IR
UPC: 840369202291



1-4X24 MM IR

MPN: 2-7X32
UPC: 840369202307



2-7X32 MM

MPN: 3-9X40
UPC: 840369202314



3-9X40 MM

MPN: 3-5-10X50
UPC: 840369202345



3.5-10X50 MM

MPN: 4-12X44SF
UPC: 840369202321



4-12X44 MM SF


MPN: 6-18X50SFIR
UPC: 840369202338



6-18X50 MM SFIR





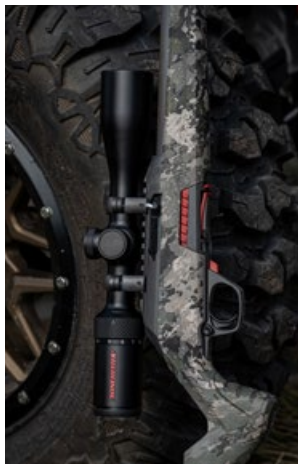



SPECIFICATIONS	1-4x24 mm IR (Illuminated Reticle)	2-7x32 mm	3-9x40 mm	4-12x44 mm SF (Side Focus)	3.5-10x50 mm	6-18x50 mm SFIR (Side Focus Illuminated Reticle)
						
ITEM NUMBER	1-4X24IR	2-7X32	3-9X40	4-12X44SF	3-5-10X50	6-18X50SFIR
UPC	840369202291	840369202307	840369202314	840369202321	840369202345	840369202338
MAGNIFICATION RANGE	1X - 4X	2X - 7X	3X - 9X	4X - 12X	3.5X - 10X	6X - 18X
OBJECTIVE LENS DIAMETER	24 mm	32 mm	40 mm	44 mm	50 mm	50 mm
OBJECTIVE OUTSIDE DIAMETER	30 mm	39.5 mm	47.5 mm	51.5 mm	57.5 mm	57.5 mm
OCULAR LENS DIAMETER	35.5 mm	35.5 mm	35.5 mm	35.5 mm	35.5 mm	35.5 mm
OCULAR OUTSIDE DIAMETER	44 mm	44 mm	44 mm	44 mm	44 mm	44 mm
BODY TUBE DIAMETER	30 mm	1 inch	1 inch	1 inch	1 inch	30 mm
LENGTH	241.7 mm [9.5 inch]	280 mm [11.1 inch]	313 mm [12.3 inch]	315 mm [12.4 inch]	331 mm [13.1 inch]	352 mm [13.8 inch]
WEIGHT	459 g [16.2 oz]	452 g [16 oz]	501.5 g [17.5 oz]	604.5 g [21.3 oz]	543 g [19 oz]	659.5 g [23 oz]
CONSTRUCTION MATERIAL	A6063-T6	A6063-T6	A6063-T6	A6063-T6	A6063-T6	A6063-T6
BODY CONSTRUCTION	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
COLOR / FINISH	Black Matte	Black Matte	Black Matte	Black Matte	Black Matte	Black Matte
WATERPROOF	YES	YES	YES	YES	YES	YES
FOGPROOF	YES	YES	YES	YES	YES	YES
SHOCKPROOF	YES	YES	YES	YES	YES	YES
SIDE FOCUS	NA	NA	NA	YES	NA	YES
PARALLAX ADJUSTMENT	NA	NA	NA	YES	NA	YES
PARALLAX ADJUSTMENT RANGE	NA	NA	NA	15 yds - ∞	NA	10 yds - ∞
PARALLAX SETTING	100 yds	60 yds	100 yds	100 yds	100 yds	100 yds
ADJUSTMENT TURRET TYPE	Low Turret-Finger Adjustable	Low Turret-Finger Adjustable	Low Turret-Finger Adjustable	Low Turret-Finger Adjustable	Low Turret-Finger Adjustable	Low Turret-Finger Adjustable
WINDAGE ADJUSTMENT RANGE	200 MOA	100 MOA	90 MOA	80 MOA	70 MOA	70 MOA
HORIZONTAL EFFECTIVE ADJUSTMENT RANGE	±100 MOA	±50 MOA	±45 MOA	±40 MOA	±35 MOA	±35 MOA
ELEVATION ADJUSTMENT RANGE	200 MOA	100 MOA	90 MOA	80 MOA	70 MOA	70 MOA
VERTICAL EFFECTIVE ADJUSTMENT RANGE	±100 MOA	±50 MOA	±45 MOA	±40 MOA	±35 MOA	±35 MOA
CLICK VALUE	0.5 MOA	0.25 MOA	0.25 MOA	0.25 MOA	0.25 MOA	0.25 MOA
RETICLE TYPE (ETCHED / WIRE)	Etched	Wire	Wire	Wire	Wire	Etched
RETICLE DESIGN	Illuminated	Plex	Plex	Plex	Plex	Illuminated
EYE RELIEF	116 - 98 mm [4.6 - 3.8 inch]	120 - 98 mm [4.5 - 3.9 inch]	120 - 98 mm [5.2 - 4.1 inch]	120 - 98 mm [4.7 - 3.9 inch]	132 - 104 mm [5.2 - 4.1 inch]	109 - 93 mm [4.3 - 3.6 inch]
EXIT PUPIL	24 mm-6 mm	14.46 mm - 4.57 mm	13.33 mm - 4.44 mm	11 mm - 3.67 mm	15.2 mm - 5.2 mm	8.33 mm - 2.77 mm
FIELD OF VIEW (FOV) @ 100 YARDS	116.6 ft - 28.8 ft	52.4 ft - 15 ft	38.4 ft - 12.8 ft	26.2 ft - 8.7 ft	27.1 ft - 9.58 ft	19.2 ft - 6.4 ft
FOCAL PLANE	Second (SFP)	Second (SFP)	Second (SFP)	Second (SFP)	Second (SFP)	Second (SFP)
DIOPTER COMPENSATION	+2/-2.5	+2/-2.5	+2/-2.5	+2/-2.5	+2/-2.5	+2/-2.5
ZERO STOP	NO	NO	NO	NO	NO	NA
THREADED FOR SUNSHADE	NO	NO	NO	NO	NO	NO
RESETTABLE TURRET	YES	YES	YES	YES	YES	YES
IP RATING	IPX7 [1 m / 30 min]	IPX7 [1 m / 30 min]	IPX7 [1 m / 30 min]	IPX7 [1 m / 30 min]	IPX7 [1 m / 30 min]	IPX7 [1 m / 30 min]
BATTERY	CR2032	NA	NA	NA	NA	CR2032
FULL MULTICOAT TYPE	Winchester WINcoat™	Winchester WINcoat™	Winchester WINcoat™	Winchester WINcoat™	Winchester WINcoat™	Winchester WINcoat™




THERMAL HUNTING SIGHTS


The Supreme THSX Thermal Hunting Sights combines advanced thermal imaging with exceptional value, delivering precision and reliability in any conditions. Featuring a highperformance sensor, they detects heat signatures through smoke, fog, and darkness, providing sharp, customizable visuals with multiple color palettes and reticle options. Their lightweight, rugged design ensures durability and ease of use, while extended battery life supports prolonged hunts. Perfect for hunters the Supreme THSX offers cutting-edge performance at an accessible price. Experience unparalleled clarity and dependability with these featurerich thermal sights, built to excel in the toughest environments.

Key Features


- » Picture in Picture Mode.
- » Digital Compass.
- » Digital Inclinometer.
- » Digital Angle Cosine Indicator.
- » Image Enhancement.
- » Reticle Color Selection.
- » Reticle Type Selection.
- » Hot Spot Tracking.
- » Boresight Adjustments.
- » Battery Status Indicator.
- » Wi-Fi Video Stream.
- » Video Recording with Audio.
- » Functional And Ergonomic Design

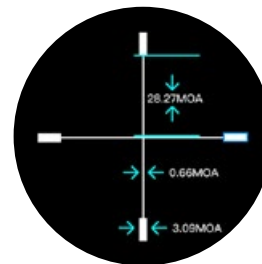


Winchester® Supreme®
Duplex Reticle



Winchester® Supreme®
Post w/ Dot Reticle

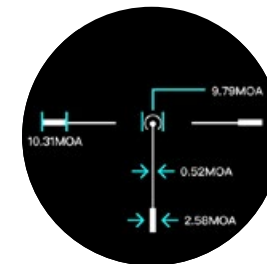

Winchester® Supreme®
MRTR Reticle

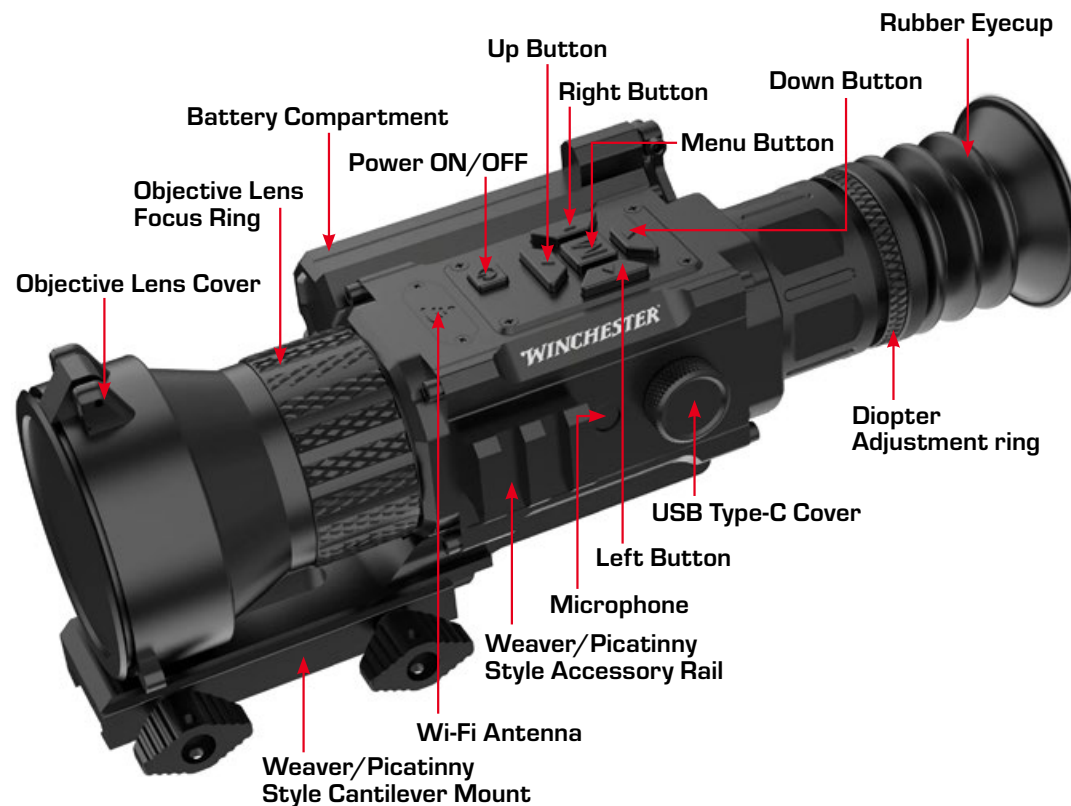

7-RETICLES



VIDEO
RECORDING



WATERPROOF
IP67



PIP MODE



IMAGE
ENHANCEMENT



DIGITAL
COMPASS



USB TYPE C



BATTERY
STATUS
INDICATOR



SUPREME
THERMAL
WARRANTY

MPN: WTOS43T5WNTHSX001
UPC: 840369205032



THSX 384

MPN: WTOS55T5WNTHSX001
UPC: 840369205056



THSX 640






THERMAL HUNTING SCOPE


The Supreme THSD 384 Thermal Hunting Scope combines advanced thermal imaging with exceptional value, delivering precision and reliability in any conditions. Featuring a high-performance sensor, it detects heat signatures through smoke, fog, and darkness, providing sharp, customizable visuals with multiple color palettes and reticle options. Its lightweight, rugged design ensures durability and ease of use, while extended battery life supports prolonged hunts. Perfect for hunters the Supreme THSD 384 offers cutting-edge performance at an accessible price. Experience unparalleled clarity and dependability with this feature-rich thermal Scope, built to excel in the toughest environments.

Key Features


- » Picture in Picture Mode.
- » Digital Compass.
- » Digital Inclinometer.
- » Digital Angle Cosine Indicator.
- » Image Enhancement.
- » Reticle Color Selection.
- » Reticle Type Selection.
- » Hot Spot Tracking.
- » Boresight Adjustments.
- » Battery Status Indicator.
- » Wi-Fi Video Stream.
- » Video Recording with Audio.
- » Functional And Ergonomic Design




Winchester® Supreme®
Duplex Reticle

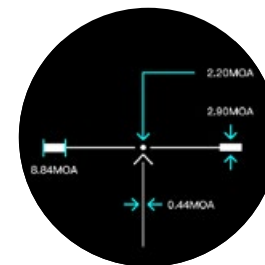

Winchester® Supreme®
Post w/ Dot Reticle



Winchester® Supreme®
MRTR Reticle

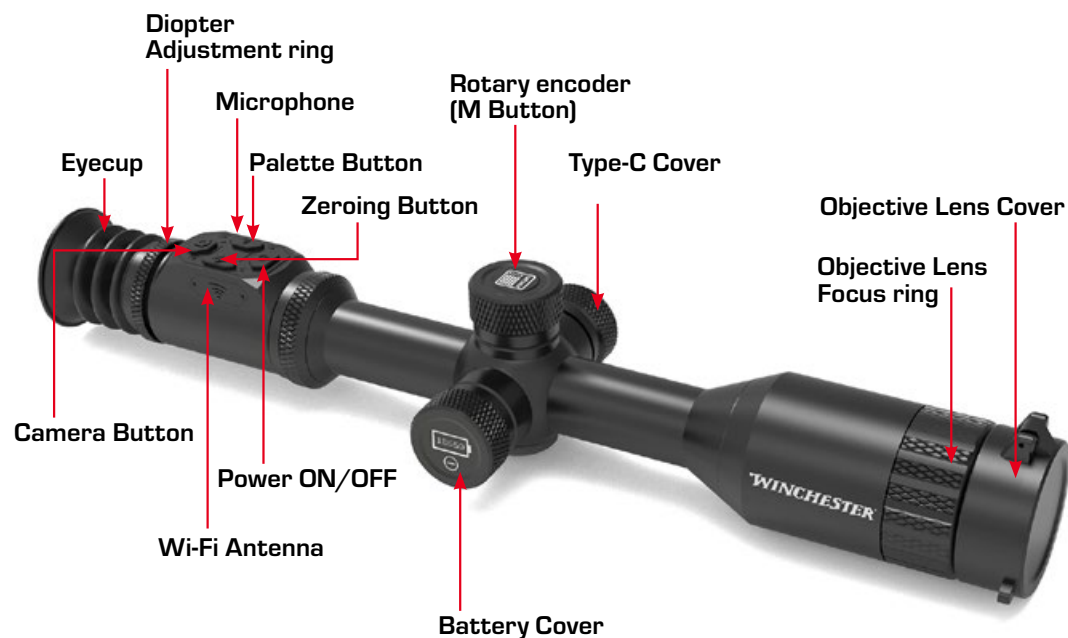

7-RETICLES



VIDEO
RECORDING



WATERPROOF
IP67



PIP MODE



IMAGE
ENHANCEMENT



DIGITAL
COMPASS



USB TYPE C



BATTERY
STATUS
INDICATOR



SUPREME
THERMAL
WARRANTY

MPN: WTOS43T5WNTHSD001
UPC: 840369205049



THSD 384











SPECIFICATIONS	THSX 384 Thermal Hunting Sight	THSX 640 Thermal Hunting Sight	THSD 384 Thermal Hunting Scope
			
MPN	WTOS43T5WNTHSX001	WTOS55T5WNTHSX001	WTOS43T5WNTHSD001
SENSOR	384×288 VOx	640×512 VOx	384×288 VOx
PIXEL SIZE	12µm	12µm	12µm
NETD	≤30mk	≤30mk	≤30mk
FRAME RATE	50Hz	50Hz	50Hz
OBJECTIVE DIAMETER	35mm	50mm	35mm
FIELD OF VIEW	7.5°×5.7°	8.78°×7.03°	7.5°×5.7°
FOCUS RANGE	3m ~ ∞	3m ~ ∞	3m ~ ∞
EYE RELIEF	45mm	45mm	45mm
EXIT PUPIL	6mm	6mm	6mm
DIOPTER ADJUSTMENT	-3 ~ +5	-3 ~ +5	-3 ~ +5
OPTICAL MAGNIFICATION	2.6×	2.3×	2.6×
DIGITAL ZOOM	1-8× Shortcut: Integer zoom. Hold and press: Continuous Zoom, with 0.2 increments	1-8× Shortcut: Integer zoom. Hold and press: Continuous Zoom, with 0.2 increments	1-8× Rotate the rotary encoder to continuous Zoom, with 0.2 increments
DETECTION DISTANCE	1150m	1865m	1150m
DISPLAY RESOLUTION	SXGA 1280x1024	SXGA 1280x1024	SXGA 1280x1024
BATTERY TYPE	18650×2	18650×2	18650×1
WORKING TIME	Up to 10h at 20°C (68°F)	Up to 10h at 20°C (68°F)	Up to 5h at 20°C (68°F)
OUTER POWER SUPPLY	5V (Type C)	5V (Type C)	5V (Type C)
RECOIL RATING	Up to .300 Win Mag	Up to .300 Win Mag	Up to .300 Win Mag
WATERPROOF	IP67	IP67	IP67
OPERATING TEMPERATURE	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C
STORAGE TEMPERATURE	-55°C~+70°C	-55°C~+70°C	-55°C~+70°C
WEIGHT	680g	720g	800g
DIMENSION	290mm × 243mm × 110mm	290mm × 243mm × 110mm	420mm × 235mm × 110mm
BALLISTIC CALCULATOR	Yes	Yes	Yes
MULTI COLOR MODE	Yes	Yes	Yes
WIFI	Yes	Yes	Yes
DIGITAL COMPASS	Yes	Yes	Yes
ZOOM MODE	Yes	Yes	Yes
RETICLE	Yes	Yes	Yes
MINI SD CARD	64GB EMMC	64GB EMMC	64GB EMMC
PIP	Yes	Yes	Yes


THERMAL HUNTING SIGHTS RETICLES

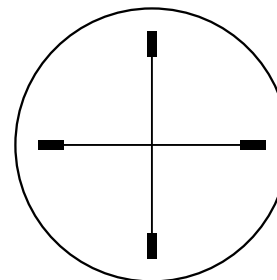


Duplex Reticle

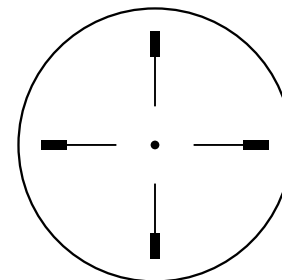


Cross w/ Dot Reticle

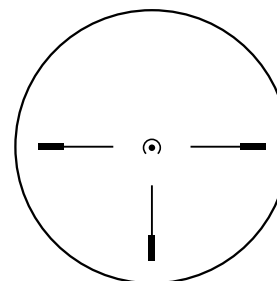


Mid Range Thermal Reticle

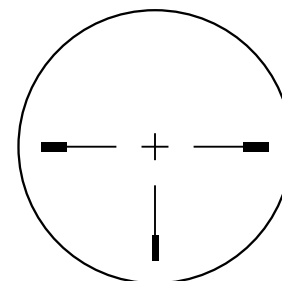


Post w/ Cross Reticle

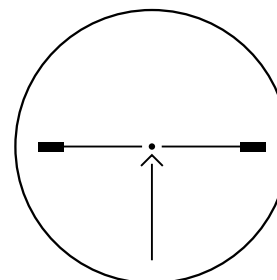

Post w/ Dot + Chevron Reticle

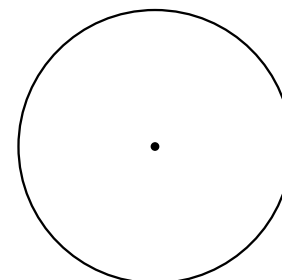

Dot Reticle

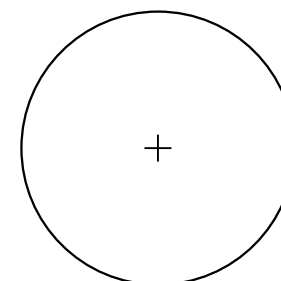

Small Cross Reticle



BINOCULARS

Introducing the Winchester® Supreme® Binoculars — setting a new standard for clarity and durability. Featuring premium HD glass, WINcoat™ coating for glare reduction and fog elimination.

Our Winchester WINcoat™ fully multicoated lenses protect from dirt and debris while transmitting maximum light to your eye with excellent color and clarity. Our modern PPS thermoplastic frame is high strength and light, with an attractive tactile coating for a sure grip in all weather conditions. Smooth focusing ensures a pleasant experience while viewing in the field, the stadium, or in the sky.

The rubberized housing ensures a solid grip in challenging conditions, while heavy knurling makes adjustments effortless, even with gloves.

Hunters and bird watchers achieve accurate color saturation with reduced weight for all day comfortable carry.



Key Features

- » High quality BAK4 prisms with high density (HD) glass for brighter, clearer, and crisper detailed images from edge to edge, even in low light conditions.
- » Fully multi-coated lenses throughout the optical system for increased light transmission, reduced glare, improved image quality and crisp edge to edge performance.
- » Silver coated phase correcting prism lenses for higher light transmission, brighter images with increased contrast.
- » Wide Band green objective and eyepiece lens coatings for excellent light transmission and reduced glare.
- » High performance PPS thermoplastic chassis construction that balances light weight with rigid construction and rugged durability.
- » Nitrile NBR / PVC protective rubber armoring that resists heat & oil, provides excellent shock absorption, provides a slip resistant grip, and has high abrasion resistance for long term use.
- » Twist up eyecups for use with or without eyeglasses.
- » Nitrogen filled and sealed optical system for fog and waterproof performance.
- » Knurled focus adjustment knobs for a secure grip.
- » Accessories: Protective nylon foam padded case with strap, belt loop, and buckle closure for ease of transportation and protection in storage, high quality comfortable binocular chest harness system with quick release buckles for all day use and hands free carrying, removable rubber eyepiece and objective covers to protect your lenses, ultra soft microfiber cleaning cloth to remove dust, smudges, and dirt.



RUBBERIZED HOUSING
SOLID GRIP, ANY ENVIRONMENT



PREMIUM GLASS
HIGH DEFINITION OPTICS



WATERPROOF
IPX7



FOG-PROOF
WINcoat™ COATING



LIMITED LIFETIME WARRANTY

MPN: W12-0842
UPC: 840369202253



8X42 MM

MPN: W12-1042
UPC: 840369202260



10X42 MM

MPN: W6-1050
UPC: 840369202277




10X50 MM

MPN: W6-1250
UPC: 840369202284



12X50 MM



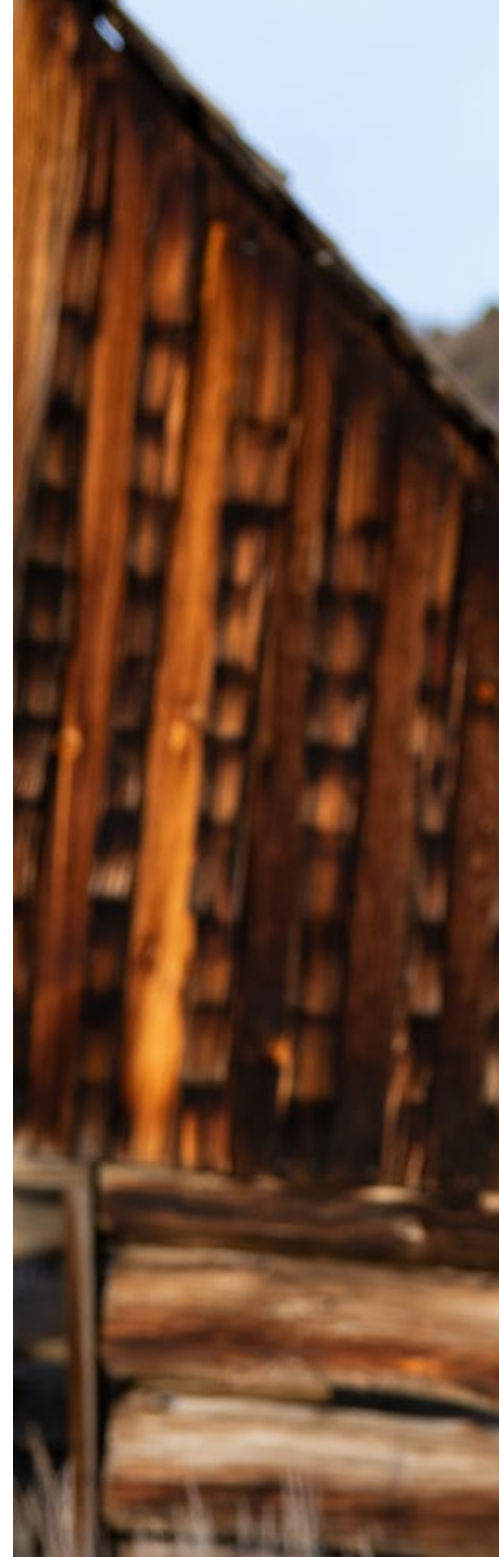



WINCHESTER® SUPREME® BINOCULAR	8X42 mm	10X42 mm	10X50 mm	12X50 mm
				
ITEM NUMBER	W12-0842	W12-1042	W6-1050	W6-1250
UPC	840369202253	840369202260	840369202277	840369202284
MAGNIFICATION	8X	10X	10X	12X
OBJECTIVE LENS DIAMETER	42 mm	42 mm	50 mm	50 mm
OCULAR LENS DIAMETER	24 mm	21 mm	23.5 mm	21 mm
TYPE OF PRISM	Roof / BaK4	Roof / BaK4	Roof / BaK4	Roof / BaK4
PRISM COATING	Silver	Silver	Silver	Silver
LENS COATING	WINcoat™ full multicoat	WINcoat™ full multicoat	WINcoat™ full multicoat	WINcoat™ full multicoat
FOCUS SYSTEM	Central focus	Central focus	Central focus	Central focus
EXIT PUPIL DIAMETER	5.3 mm	4.3 mm	4.88 mm	4.19 mm
EXIT PUPIL DISTANCE	17.5 mm	15.1 mm	17 mm	15 mm
FIELD OF VIEW (FOV)	7.5°	6.2°	6.1°	5.2°
FOV 1000 YARDS	395 ft	330 ft	321 ft	273 ft
FOV 1000 METERS	132 m	110 m	107 m	91 m
CLOSE FOCUS MINIMUM	3 m / 10 ft	3 m / 10 ft	3 m / 10 ft	3 m / 10 ft
DIOPTER SYSTEM	Right diopter ring	Right diopter ring	Right diopter ring	Right diopter ring
DIOPTER COMPENSATION	±3	±3	±3	±3
INTERPUPILLARY DISTANCE	56~73 mm	56~73 mm	57~72 mm	57~72 mm
WEATHER PROOF	Yes	Yes	Yes	Yes
WATERPROOF	Yes	Yes	Yes	Yes
NITROGEN FILLED	Yes	Yes	Yes	Yes
EYECUPS SYSTEM	Twist-up	Twist-up	Twist-up	Twist-up
CHASSIS MATERIAL	PPS	PPS	PPS	PPS
IP RATING	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)





SPOTTING SCOPES

Winchester Supreme spotting scopes incorporate brilliant fully multicoated glass that transmits intense colors and crisp detail, even in low light conditions. Color-saturated images with razor-sharp contrast and clarity that make the smallest details come to life. A smooth focus dial allows precise adjustments to define fur, feathers or antlers at extreme distances, and a large magnification range means your 100% waterproof spotter is perfect for all your outdoor adventures. A rotating collar positions the scope for maximum comfort and utility on the bench or in the field. Light weight and ergonomic, your Winchester Supreme spotting scope comes with a bench top tripod and a quality protective case designed for field use and carry.

Maximum power for the finest details at the longest distances! Our 65mm version provides ample power for hunters on the move, and our 80mm version allows maximum light transmission to the eye for the sharpest contrast and detail in all conditions, especially dawn and dusk.

Key Features

- » Multi-coated lenses
- » Nitrogen Sealed Housing
- » Fogproof
- » 100% Waterproof rubber armor housing
- » Bench Tripod Included
- » Rugged Carrying Case & Lens Cloth Included

Twist-up Eyecup

Zoom Ring

Focus Knob

Slide-Out Sun Shade

Tripod Mounting Base (rotatable)

80 mm model shown for reference



The spotting scope also includes a bench tripod, carrying/field case with a shoulder strap, lens cleaning cloth, and lens covers.



**DURABLE
CONSTRUCTION**



REDUCED GLARE
WINcoat COATING



FOG-PROOF
WINcoat™ COATING



WATERPROOF
IPX7



PREMIUM GLASS
HIGH DEFINITION OPTICS



**LIMITED LIFETIME
WARRANTY**



MPN: 12-20-60X65
UPC: 840369204332

20-60X65 MM



MPN: SPRM13-20-60X80
UPC: 840369204349

20-60X80 MM











WINCHESTER® SUPREME® SPOTTING SCOPE	20-60x65 mm Angled		20-60x80 mm Angled	
				
ITEM NUMBER	12-20-60X65		SPRM13-20-60X80	
UPC	840369204332		840369204349	
POWER	20X	60X	20X	60X
OBJECTIVE LENS DIAMETER	65 mm	65 mm	80 mm	80 mm
OCULAR LENS DIAMETER	20.5 mm	20.5 mm	25 mm	25 mm
EXIT PUPIL DIAMETER	3.2 mm	1.1 mm	4.0 mm	1.3 mm
OCULAR LENS OUTSIDE DIAMETER	22 mm	22 mm	28 mm	28 mm
OBJECTIVE LENS OUTSIDE DIAMETER	66.5 mm	66.5 mm	82 mm	82 mm
EXIT RELIEF	18 mm	13 mm	17 mm	15 mm
FIELD OF VIEW	1.9°	0.9°	1.9°	0.9°
	99 ft	48 ft	99 ft	48 ft
	33 m	16 m	33 m	16 m
MIN. FOCAL LENGTH	6 m	6 m	8 m	8 m
	19 ft	19 ft	26 ft	26 ft
WATERPROOF	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)	IPX7 (1 m / 30 min)
SUN SHADE	Yes	Yes	Yes	Yes
NITROGEN FILLED	Yes	Yes	Yes	Yes
EYECUPS SYSTEM	Twist-up	Twist-up	Twist-up	Twist-up
UNIT DIMENSION	375 x 85 x 155 mm	375 x 85 x 155 mm	485 x 100 x 175 mm	485 x 100 x 175 mm
	14.76" x 3.35" x 6.10"	14.76" x 3.35" x 6.10"	19.09" x 3.94" x 6.89"	19.09" x 3.94" x 6.89"
UNIT WEIGHT	1120 g	1120 g	1700 g	1700 g
	39.51 oz	39.51 oz	59.97 oz	59.97 oz
CONSTRUCTION MATERIAL	ABS		ABS	
TRIPOD SIZE	295 × 63 × 67 mm / 11.6" × 2.5" × 2.64"		295 × 63 × 67 mm / 11.6" × 2.5" × 2.64"	
TRIPOD WEIGHT	238 g / 8.4 oz		238 g / 8.4 oz	
TRIPOD MAX HEIGHT	245 mm / 9.65"		245 mm / 9.65"	
TRIPOD CONSTRUCTION	2A12 Steel Alloy		2A12 Steel Alloy	



RANGEFINDER

When your hunt demands precise ranging over vast distances, Winchester® Supreme® Laser Rangefinders deliver the performance and durability you need.

The Winchester® Range Rider HD2,000/3,000 laser rangefinder offers a maximum range of 2,000/3,000 yards, with 750/1,500 yards on game. Featuring 6x or 7x magnification and an HD optical system, it provides enhanced clarity and detail for spotting game at long distances.

The red OLED display ensures visibility in low light conditions, while three target modes (Normal, First, and Last) and two ranging modes (HCD and LOS) adapt to any hunting environment.

Key Features

- » Maximum Range 2,000/3,000 yards
- » 6x/7x Magnification
- » Coated HD Optics
- » 100% Waterproof Rubber Armor Housing
- » Three Target Modes
- » Wrist strap lanyard, padded carrying case, lens cleaning cloth, and one CR2 battery.



FAST & ACCURATE
RELIABLE MEASUREMENTS



WATERPROOF
IPX4



PREMIUM GLASS
HIGH DEFINITION OPTICS



ENERGY EFFICIENT
40-HOUR RUN TIME



CR2 BATTERY
INCLUDED



LIMITED LIFETIME
WARRANTY

MPN: SPRM10-6X20
UPC: 840369204325



6X20 MM

MPN: SPRM11-7X24
UPC: 840369204318



7X24 MM












WINCHESTER® SUPREME® LASER RANGEFINDER	6x20 mm	7x24 mm
		
ITEM NUMBER	SPRM10-6X20	SPRM11-7X24
UPC	840369204325	840369204318
MAGNIFICATION	6X	7X
OBJECTIVE LENS DIAMETER	20 mm	24 mm
OCULAR LENS DIAMETER	14 mm	14 mm
MINIMUM RANGE	5 yds	5 yds
MAX REFLECTIVE RANGE	2000 yds	3000 yds
RANGE (BUILDING)	1200 yds	1700 yds
RANGE (TREE)	900 yds	1200 yds
RANGE (DEER)	750 yds	1000 yds
INCLINOMETER	± 60°	± 60°
BATTERY TYPE	CR2	CR2
DISPLAY	RED LCD	RED OLED, 7 Brightness Settings
TARGETING MODES	Normal, First, Last	Normal, First, Last
RANGING MODES	HCD, LOS	HCD, LOS
SIZE	98 × 78 × 36 mm / 3.86" × 3.07" × 1.42"	114 × 76 × 37 mm / 4.49" × 2.98" × 1.47"
WEIGHT	5.54 oz with battery / 157 g	6.1 oz with battery / 173 g
EYE RELIEF	14 mm	14 mm
ANGULAR FIELD OF VIEW	6.5°	6.5°
LINEAR FIELD OF VIEW	114 m @ 1000 m, 114 y @ 1000 y	114 m @ 1000 m, 114 y @ 1000 y
IP RATING	IPX4	IPX4
MATERIAL	PPS, PC+ABS, Rubber, Optical Glass	PPS, PC+ABS, Rubber, Optical Glass

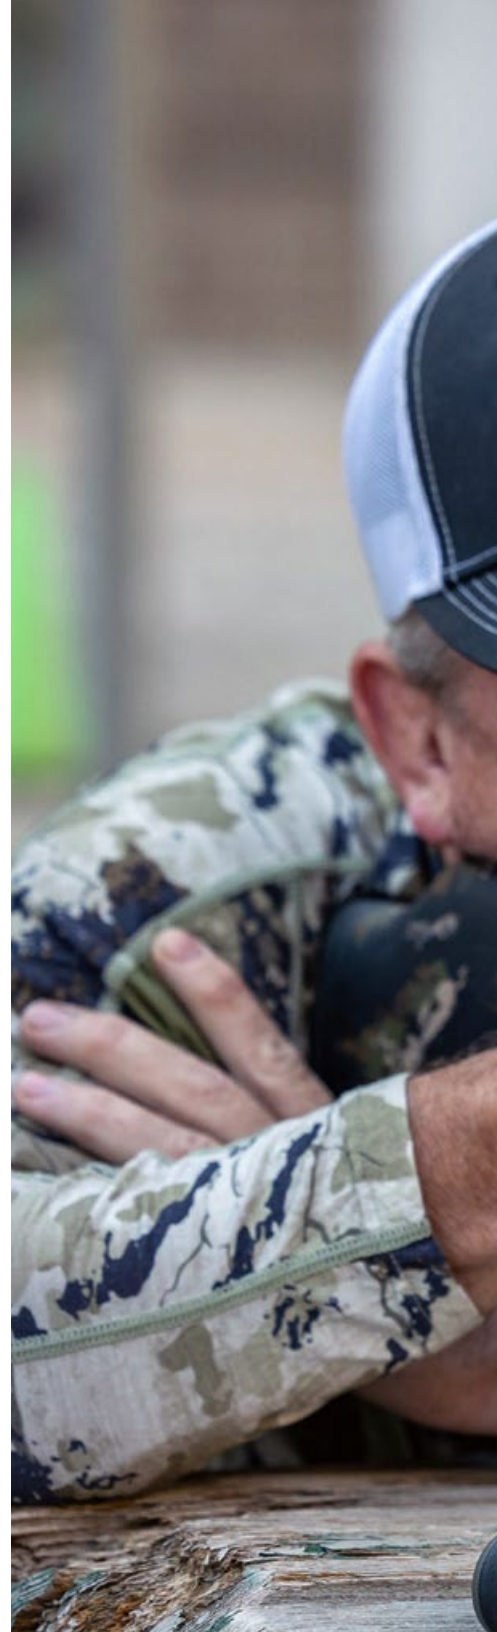





Riflescopes ■ Thermal Hunting Sights ■ Binoculars ■ Spotting Scopes ■ Rangefinders

A LEGENDARY BRAND. A LEGENDARY PROMISE.

Phone: 888-213-0058 | Email: info@winchesteroptics.com | Web: winchesteroptics.com
©2026 Apogee, Inc. | Made by Apogee, Inc. for Winchester® | Winchester® is a registered trademark of Olin Corporation and is used with permission.